

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
10 May 2001 (10.05.2001)

PCT

(10) International Publication Number  
**WO 01/33885 A1**

(51) International Patent Classification<sup>7</sup>: **H04Q 7/38**

(74) Agent: **BERGGREN OY AB**; P.O. Box 16, FIN-00101 Helsinki (FI).

(21) International Application Number: **PCT/FI00/00955**

(22) International Filing Date:  
2 November 2000 (02.11.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
19992369 2 November 1999 (02.11.1999) FI

(71) Applicant (for all designated States except US): **NOKIA MOBILE PHONES LTD.** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A SIGNALLING METHOD

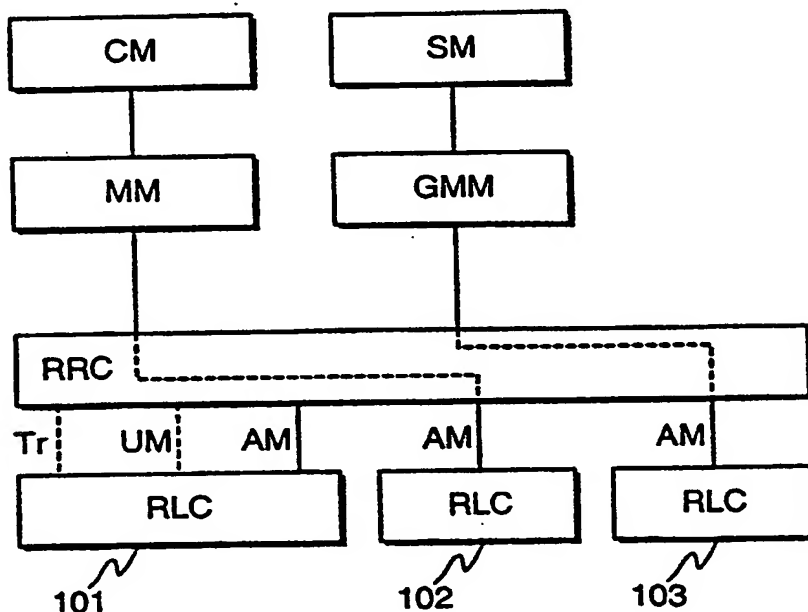

(57) Abstract: The invention relates to methods for transmission of signalling data in cellular telecommunication networks. According to the invention, multiple radio bearers can be allocated for transferring signalling traffic, but all higher layer signalling is in any case taken through the RRC protocol. In the inventive method, MM and higher layer messages are sent using RRC DIRECT TRANSFER messages, but a separate RLC entity is set up for RRC DIRECT TRANSFER messages. In various embodiments of the invention, separate radio bearers can be set up for individual CN domains and/or upper layer protocols and/or for a group of RRC messages.

WO 01/33885 A1

## A signalling method

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

- 5 The invention relates to methods for transmission of signalling data in cellular telecommunication networks. Especially, the invention is related to such a method as specified in the preamble of the independent method claim.

#### 2. Description of Related Art

- 10 The current concept of a signalling radio bearer in the UMTS system (universal mobile telecommunication system) defines that there is only one radio bearer for signalling traffic between the cellular network and a mobile communication means. Both the RRC (radio resource control) and higher protocol layers use the same radio bearer, i.e. the same RLC (radio link control) entity. In some implementations it is possible to have two RLC entities for signalling traffic, one entity for  
15 unacknowledged mode transfer and one entity for acknowledged mode transfer. However, there is currently no means to treat these entities separately for example for setup, reconfiguration or release. The signalling radio bearer, sometimes called the signalling link, is set up during the RRC connection establishment procedure. In some implementations, it is even possible that the radio bearer service is actually  
20 provided by the PDCP layer. In this case the PDCP will run in transparent mode for signalling traffic.

- Higher layer messages, such as MM (mobility management) or CM (connection management) layer messages are carried between a mobile communication means and the network in a RRC DIRECT TRANSFER message payload. The protocol  
25 stack is illustrated in figure 1. Figure 1 shows an example of a partial protocol stack of a circuit switched core network (CN) domain, which protocol stack comprises connection management (CM) and mobility management (MM) protocol layers, and an example of a protocol stack of a packet switched core network domain, which protocol stack comprises session management (SM) and packet switched domain  
30 mobility management (PMM) protocol layers. Both of these protocol stacks communicate with the RRC (radio resource control) layer, which handles the transmission of the higher layer protocol messages in a RRC DIRECT TRANSFER MESSAGE payload. The radio link control protocol can be set up to provide

unacknowledged or acknowledged data transmission service. Each RLC instance is configured by RRC to operate in one of three modes: transparent mode (Tr), unacknowledged mode (UM) and acknowledged mode (AM). The transparent and unacknowledged mode are used by some of the RRC signalling procedures

5 Majority of RRC signalling procedures including the Direct Transfer procedure utilize acknowledged mode transfer. The service that the RLC layer provides to upper layers is called radio bearer (RB). A radio bearer with the corresponding Iu bearer comprises a radio access bearer (RAB).

The problems with the prior art solution used at the time of writing this patent application are mainly related to priority control of signalling traffic. A problem can arise for example in a case, when a very long higher layer message is passed to RLC layer which buffers the message, and when a time critical RRC message also needs to be sent. In this situation, the RLC layer transmits the buffered messages first before transmitting more recent messages, which results in a delay of the time

15 critical RRC message. Currently there are no mechanisms allowing prioritization of more recent messages over those messages waiting in RLC transmission buffer. It is also possible that higher layer signalling such as MM and CM will need some prioritization means between the various higher layer protocols.

At the time of writing this patent application, a requirement has recently been identified which may finally require that several signalling radio bearers can be set up so that different QoS (quality of service) parameters can be used for different types of signalling. One solution for this requirement has been proposed. According to this solution, MM and higher layer signalling is carried over the air interface like any user traffic, in a separate radio bearer. This solution creates some problems

25 related to integrity control function - which is defined as a RRC layer function - and to the existing procedures in Iu interface.

Figure 2 illustrates protocol stack configuration for signalling transfer according to a recently proposed solution. According to this solution, signalling traffic of MM and other higher layer protocols are transmitted directly using PDCP services. In this solution, only function that would be required from PDCP layer is the integrity protection. According to the solution, either one user plane radio bearer is used for all higher layer signalling protocols or a separate user plane radio bearer is allocated for each higher layer protocol stack. In the example of figure 2 each CN domain employs a different radio access bearer (RAB) for signalling between UE and each

35 CN domain. According to this solution, priority control between MM and RRC

messages can be handled in RLC/MAC using normal radio bearer/logical channel priority control mechanisms.

5 This proposal has some disadvantages. For example, the proposed solution increases the complexity of the MM and PMM protocol implementations, since primitive interfaces are needed not only for the RRC protocol, but for the PDCP protocol as well. The proposed solution would also be an addition to current PDCP functions and change radically the basic function of PDCP as a packet service dependent sublayer. This would add complexity to the implementations of the PDCP protocol. Further, since PDCP is only intended for transmission of user plane traffic, in the  
10 proposed solution UE-CN signalling would be treated like user plane traffic, which implies that some modifications will most probably be needed also to the current Lu interface specifications. Further, in the proposed solution integrity protection needs to be implemented in two places: in PDCP layer for MM and higher layer signalling and in RRC layer for RRC signalling. As a consequence, the complexity of PDCP  
15 protocol increases and an additional header field is needed in PDCP data payload data units (PDU), since the integrity function requires a counter value to be transmitted with each piece of integrity protected data for use by the integrity protection algorithm.

#### SUMMARY OF THE INVENTION

20 An object of the invention is to realize a signalling method, which alleviates the aforementioned problems of prior art. A further object of the invention is to provide a method for transmission of control signalling, which allows determining of quality of service levels for different signalling traffic streams. A still further object of the invention is to provide the aforementioned objects of the invention, without adding  
25 complexity in the protocol layers above the RRC protocol layer.

The objects are reached by setting up at least two signalling radio bearers for transmission of signalling traffic, and specifying rules for routing of higher layer signalling to the signalling radio bearers.

30 The method according to the invention is characterized by that, which is specified in the characterizing part of the independent method claim. The network element according to the invention is characterized by that, which is specified in the characterizing part of the independent claim directed to a network element. The mobile communication means according to the invention is characterized by that, which is specified in the characterizing part of the independent claim directed to a

mobile communication means. The dependent claims describe further advantageous embodiments of the invention.

According to the invention, at least two signalling radio bearers are set up for transmission of signalling traffic and the cellular network configures how the signalling of higher layer protocols is mapped to said signalling radio bearers. Multiple radio bearers can be allocated for transferring signalling traffic, but all higher layer signalling is in any case taken through the RRC protocol.

In the inventive method, MM and higher layer messages are sent using RRC DIRECT TRANSFER messages, but separate RLC entities can be set up for RRC DIRECT TRANSFER messages. In various embodiments of the invention, separate radio bearers can be set up for individual CN domains and/or upper layer protocols and/or for a group of RRC messages.

Routing of messages to signalling bearers can advantageously be performed on the basis of CN domain identity information contained in every RRC DIRECT TRANSFER data unit. In embodiments, in which separate radio bearers are set up for different upper layer protocols or different groups of upper layer protocols, the routing of RRC DIRECT TRANSFER data units is advantageously performed on the basis of examination of the contents of data units and interpreting, with which protocol each data unit is associated.

The inventive method provides integrity protection of MM and higher layer messages as a consequence of the transmission of the messages in RRC DIRECT TRANSFER messages. The inventive method allows controlling of priority between MM and higher layer messages and RRC messages in the radio interface by adjusting the QoS parameters of bearers used to transfer the messages.

## BRIEF DESCRIPTION OF THE DRAWINGS

The invention is described in more detail in the following with reference to the accompanying drawings, of which

Figure 1 illustrates protocol stack configuration for signalling transfer according to prior art,

Figure 2 illustrates protocol stack configuration for signalling transfer according to another solution of prior art,

Figure 3 illustrates protocol stack configuration for signalling transfer according to an advantageous embodiment of the invention,

Figure 4 illustrates RRC signalling related to radio bearers,

Figure 5 illustrates a method according to an advantageous embodiment of the invention,

Figure 6 illustrates an example of the structure of a radio network controller according to an advantageous embodiment of the invention, and

Figure 7 illustrates an example of the structure of a mobile communication means according to an advantageous embodiment of the invention.

## 10 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

### A. A FIRST GROUP OF ADVANTAGEOUS EMBODIMENTS OF THE INVENTION

Figure 3 illustrates protocol stack configuration for signalling transfer according to an advantageous embodiment of the invention. This figure illustrates the example case that a separate radio bearer is reserved for each CN domain. In figure 3, each radio bearer is represented by a RLC entity corresponding to the radio bearer. Figure 3 illustrates, that signalling from the circuit switched CN domain (CM, MM) is transmitted via a second RLC entity 102, while signalling from the packet switched CN domain (SM, PMM) is transmitted via a third RLC entity 103, while a first RLC entity is used for transmission of the rest of RRC messages.

According to the invention, the RRC protocol can use one or more signalling radio bearers (SRB) i.e. RLC entities for transmission of signalling traffic between the network and the mobile communication means, i.e. UE (user equipment). In other words, the signalling link between a UE and a RNC (radio network controller) can comprise one or more signalling radio bearers.

The UE can be commanded to use only one signalling radio bearer for all signalling. An additional signalling radio bearer can be set up and the RRC layer and the UE can be configured to send all RRC DIRECT TRANSFER messages using this additional signalling radio bearer. Further, more than one signalling radio bearers can be set up by the network. Preferably, the network makes the decisions about the configuration of the signalling radio bearers. Different rules for using the more than one signalling radio bearers can be used in different embodiments of the invention.

For example, in an advantageous embodiment of the invention, separate signalling radio bearers are used for each CN domain protocol stack. Such an embodiment is illustrated in figure 3. In such an embodiment, the RRC layer can route the RRC DIRECT TRANSFER messages to correct radio bearer by checking the CN domain identification information in the data units comprising the messages.

As a second example, in an advantageous embodiment of the invention, separate signalling radio bearers are used for each higher layer protocol. In such an embodiment, the RRC layer can route the RRC DIRECT TRANSFER messages to correct radio bearer by checking the NAS (network access stratum) protocol discriminator information in the data units comprising the messages.

As a third example, in an advantageous embodiment of the invention, separate signalling radio bearers are used for various predefined groups of higher layer protocols. In such an embodiment, the RRC layer can route the RRC DIRECT TRANSFER messages to correct radio bearer by checking the NAS (network access stratum) protocol discriminator information in the data units comprising the messages. In such an embodiment, each signalling radio bearer carrying higher level protocol signalling has a corresponding predefined set of NAS protocol discriminators.

The invention is not limited to these rules for deciding about the usage of the signalling radio bearers, since other types of rules can as well be used. For example, the decision of which signalling radio bearer to use for any given message can in an embodiment of the invention be based on the PDU size. In such an embodiment, the length of each message is checked, and the bearer to be used is selected at least partly on the basis of the result of this checking.

In a further advantageous embodiment of the invention, the routing is based on a Quality of Service parameter attached to the higher layer protocol data. In such an embodiment, higher layer protocols may add a QoS parameter to single messages, to plurality of messages, or for example to all messages in order to ensure, that the messages are routed via a signalling radio bearer fulfilling the desired QoS level. In such an embodiment, the RRC layer can route the RRC DIRECT TRANSFER messages to correct signalling radio bearer by checking the additional QoS class information from the data units comprising the messages. There can be for example a predefined set of QoS classes for higher layer signalling messages, for example two QoS classes, or the number of QoS classes can be decided by the network. Preferably, for each QoS class a separate radio bearer is set up. An example of this

QoS class separation could be the short message service (SMS) which could use lower priority than other signalling.

The functionality for performing the decisions about the number of signalling radio bearers and about the rules for dividing traffic to these signalling radio bearers can be implemented in many different network elements of a radio access network (RAN). Preferably, the network element performing the decisions about the number of signalling radio bearers and about the rules for dividing traffic to these signalling radio bearers is the radio network controller (RNC).

In a further embodiment of the invention, the rules to be used can be selected out of a predefined set of rules by using the number of signalling radio bearers. In this embodiment, each possible amount of signalling radio bearers is associated with a predefined set of rules.

In a further advantageous embodiment of the invention, one of the signalling radio bearers can be defined as a master signalling radio bearer. This radio bearer is set up only in the RRC connection establishment procedure and released only in the RRC connection release procedure. This master SRB would be used as the prior art signalling bearer. Such an embodiment ensures, that all signalling bearers are not released in error during the RRC connection, since the master SRB in this embodiment cannot be controlled by radio bearer control messages.

## B. A SECOND GROUP OF ADVANTAGEOUS EMBODIMENTS OF THE INVENTION

In an advantageous embodiment of the invention, the messages used for controlling radio bearers are used for controlling the signalling radio bearers as well. The messages are the RRC CONNECTION SETUP, RADIO BEARER RECONFIGURATION, RADIO BEARER RELEASE, and RADIO BEARER SETUP messages. The usage of the messages is described in the following with reference to figure 4. In the prior art, these messages are only used to control the user-plane radio bearers, not signalling. More details of the prior art use of these messages and a description of the other messages of the RRC protocols can be found in the RRC protocol specifications of the UMTS system. Figure 4 illustrates four RRC layer procedures, namely RRC connection establishment, radio bearer setup, radio bearer reconfiguration, and radio bearer release procedures. The RRC connection establishment procedure initiates the RRC connection between the mobile communication means and the network, while the other three of these four



procedures listed here are used to control single radio bearers and may or may not occur during the lifetime of a RRC connection. Figure 4 shows signalling between a mobile communication means (UE, user equipment) and the radio access network (UTRAN, UMTS terrestrial radio access network).

- 5 The RRC connection establishment procedure is initiated by the UE, which sends  
300 a RRC CONNECTION REQUEST message to the radio access network. The  
radio access network responds to the message by sending a RRC CONNECTION  
SETUP message, which comprises information about various parameters about the  
RRC connection to be established. The UE finishes the RRC connection  
10 establishment procedure by sending 310 a RRC CONNECTION SETUP  
COMPLETE message.

- The radio bearer setup procedure is initiated by the network, which sends 320 a  
RADIO BEARER SETUP message to the UE. The message comprises information  
about various parameters of the radio bearer about to be established. The UE  
15 responds to the message by sending 325 a RADIO BEARER SETUP COMPLETE  
message.

- The radio bearer reconfiguration procedure is initiated by the network, which sends  
330 a RADIO BEARER RECONFIGURATION message to the UE. The message  
comprises information about new values of parameters for the radio bearer or  
bearers affected. The UE responds to the message by sending 335 a RADIO  
20 BEARER RECONFIGURATION COMPLETE message.

- The radio bearer release procedure is initiated by the network, which sends 340 a  
RADIO BEARER RELEASE message to the UE. The message comprises  
information identifying the bearer to be released. The UE responds to the message  
25 by sending 335 a RADIO BEARER RELEASE COMPLETE message.

- According to an advantageous embodiment of the invention, the setting up and  
configuration of all the signalling radio bearers is done during the RRC connection  
establishment procedure. This can advantageously be effected by adding  
information about the signalling radio bearers to be established to the RRC  
30 CONNECTION SETUP message. One advantageous example of the organization of  
such information is presented later in this application.

In one advantageous embodiment of the invention, only one signalling radio bearer  
is set up and configured during the RRC connection establishment procedure. In

such an embodiment, further signalling radio bearers can be set up and configured later during the RRC connection, if need for that arises.

In an advantageous embodiment of the invention, the radio access network can set up additional Signalling Radio Bearers during the RRC connection and configure how the higher layer signalling is mapped into the new and existing signalling radio bearers. This can advantageously be effected by adding information about the signalling bearers to be established to the RADIO BEARER SETUP message. One advantageous example of the organization of such information is presented later in this application.

10 In an advantageous embodiment of the invention, the radio access network can re-configure the mapping between higher layer signalling and any existing signalling radio bearer during the RRC connection. This can advantageously be effected by adding information about the signalling bearers to be reconfigured to the RADIO BEARER RECONFIGURATION message. One advantageous example of the organization of such information is presented later in this application.

15 In an advantageous embodiment of the invention, the radio access network can release any signalling radio bBearers during the RRC connection and reconfigure the mapping between higher layer signalling and any remaining signalling radio bearers. This can advantageously be effected by adding information about the signalling bearers to be released and the new reconfiguration information to the RADIO BEARER RELEASE message. One advantageous example of the organization of such information is presented later in this application.

20 The following paragraphs and tables show examples according to various advantageous embodiments of the invention about how information pertaining to signalling radio bearers can be presented in the referred messages.

25 In the RRC CONNECTION SETUP message, the information about signalling radio bearers can be presented among the radio bearer information elements as shown in the following table. Note that for clarity, the following table lists only radio bearer (RB) information elements of the message.

<i>RB information elements</i>	
<i>Information Element</i>	<i>Range</i>
Signalling Radio Bearer information	0 to <MaxSRBCount>
RB identity	
Signalling Radio Bearer type	
RB mapping info	
SRB mapping info	

The parameter "Signalling Radio Bearer information" indicates the number of signalling radio bearers. The other four parameters are then repeated the indicated number of times. The parameter "RB identity" identifies the radio bearer. The purpose of the "Signalling Radio Bearer Type" information element is to indicate the RLC parameters needed for the Signalling Radio Bearer. Advantageously, each possible value of "Signalling Radio Bearer Type" information element refers to a predefined set of parameters. The parameter "RB mapping info" indicates, as in prior art, details about multiplexing RLC frames to physical layer channels. The parameter "SRB mapping info" indicates how various protocol messages are mapped to the particular SRB. The parameter "MaxSRBCount" defines the maximum number of signalling radio bearers.

In the RADIO BEARER RECONFIGURATION message, the SRB information can be represented by a "SRB mapping info" parameter among the RB information elements. The parameter is optional, and only present if the particular radio bearer is a signalling radio bearer.

In the RADIO BEARER RELEASE message, the SRB information can be represented by a "SRB mapping info" parameter among the RB information elements. The parameter is optional, and only present if the particular radio bearer is a signalling radio bearer.

In the RADIO BEARER SETUP message, the SRB information can be represented by a "SRB mapping info" parameter among the new RB information elements, if the particular new RB is to be a SRB, and by a "SRB mapping info" parameter among information elements for other radio bearers affected by the message, if the

particular other RB is a SRB. These parameters are optional, and only present if the particular radio bearer is a signalling radio bearer.

In one advantageous embodiment of the invention, the allowed values of "SRB mapping info" parameter i.e. information element range from 0 to 7 with the following meanings:

- 0 all RRC signalling
- 1 all RRC signalling except RRC Direct Transfer messages
- 2 all RRC Direct Transfer messages
- 3 RRC Direct Transfer messages with specified CN Domain Identities
- 10 4 RRC Direct Transfer messages carrying NAS message with the specified PD
- 5 only the specified RRC messages
- 6-7 reserved for future use

If the value is 3, 4, or 5, then also information elements describing details of correspondingly CN domain identities, NAS PD information, and RRC message types are present.

### C. A THIRD GROUP OF ADVANTAGEOUS EMBODIMENTS OF THE INVENTION

Figure 5 illustrates a method according to an advantageous embodiment of the invention. Figure 5 illustrates a method for transmission of signalling data in a cellular telecommunication system between the cellular network and a mobile communication means. According to the example of figure 5, the method comprises steps of setting up 200 of at least two signalling radio bearers for transmission of signalling traffic, and configuring 201 of how the signalling of higher layer protocols is mapped to said signalling radio bearers.

According to an advantageous embodiment of the invention, the method further comprises the step of routing 210 of signalling traffic data units via said at least two signalling radio bearers according to predefined rules.

In a further advantageous embodiment of the invention, said predefined rules are set by a network element of a radio access network of the cellular telecommunication system.

In a still further advantageous embodiment of the invention, said predefined rules are set by a radio network controller.

5 According to an advantageous embodiment of the invention, in said step of routing 210, signalling from different core network domains is routed 210a via separate signalling radio bearers.

According to a further advantageous embodiment of the invention, in said step of routing 210, signalling of a higher layer protocol is routed 210b via a signalling radio bearer specific to said higher layer protocol.

10 According to a still further advantageous embodiment of the invention, in said step of routing 210, signalling traffic of a predefined group of higher layer protocols is routed 210c via a signalling radio bearer corresponding to said predefined group.

15 According to a still further advantageous embodiment of the invention, in said step of routing, signalling traffic of higher layer protocols is routed via a signalling radio bearer based on a Quality of Service parameter attached to the higher layer protocol data.

In a further advantageous embodiment of the invention, said setting up and configuration of said signalling radio bearers is performed during the RRC connection establishment procedure.

20 In an even further advantageous embodiment of the invention, the method comprises steps of setting up of a further signalling radio bearer during the RRC connection, and configuring the mapping of higher layer signalling to said further signalling radio bearer and previously existing signalling radio bearers.

25 In an even further advantageous embodiment of the invention, the method comprises the step of reconfiguring the mapping of higher layer signalling to said signalling radio bearers.

In an even further advantageous embodiment of the invention, the method comprises the step of releasing a signalling radio bearer.

#### D. A FOURTH GROUP OF ADVANTAGEOUS EMBODIMENTS OF THE INVENTION

30 Figure 6 illustrates the functional structure of a typical radio network controller 400 of a cellular telecommunications network using as an example the structure of a

RNC of a UMTS radio network utilizing WCDMA (wideband code division multiple access) transmission method. The invention is not limited to the UMTS system, but can be used in other similar systems as well.

5 The radio network controller 400 comprises a switching fabric unit (SFU) 450 to which several control processor units can be connected. Multiplexing units (MXU) 440 can be used between a number of processor units and the SFU to map the low bit rate data flows from the processor units into the high bit rate data flows of the SFU input ports. The network interface units (NIU) 410 handle the physical layer connections to different interfaces, such as Iub interface toward Node B elements, 10 Iur interface towards other RNCs, and the Iu interface towards core network nodes. The operations and maintenance unit (OMU) 430 contains the RNC configuration and fault information and can be accessed from external operations and maintenance center. The signalling units (SU) 420 implement all the control and user plane protocols required in the RNC. Accordingly, the invention can be implemented in a 15 RNC in the signalling units 420. The invention can be implemented using means 460 comprising software executed in the processors of the signalling units, which software causes the signalling units to perform according to the invention.

20 In an advantageous embodiment of the invention, a network element of a radio access network of a cellular telecommunication system is provided. According to the embodiment, the network element is arranged to set up at least two signalling radio bearers for transmission of signalling traffic and to configure how the signalling of higher layer protocols is mapped to said signalling radio bearers.

In a further advantageous embodiment of the invention, the network element is a radio network controller.

25 Figure 7 illustrates roughly the functional structure of a typical mobile communication means (UE) 500. The UE comprises a user interface (UI) 550, a control unit 540, a DSP unit 530, an RF unit 520, and an antenna 510. The RF unit handles the radio frequency processing of received and transmitted signals and converts the received signals to digital form. The DSP unit handles physical layer 30 processing such as interleaving, channel coding, multiplexing, and segmentation. The DSP unit 530 can also implement a part of or all of layer 2 radio protocols such as the MAC, RLC, and PDCP protocols. Layer 3 protocols such as the RRC, MM, and CM protocols and typically also a part of layer 2 protocols are implemented in the control unit 540. Accordingly, the invention can be implemented 35 in a UE in the control unit 540. The invention can be implemented using means 560

comprising software executed in the processor of the control unit, which software causes the control unit to perform according to the invention.

According to a further advantageous embodiment of the invention, a mobile communication means for a cellular telecommunication system is provided

- 5 According to the embodiment, the mobile communication means is arranged to route radio resource control protocol messages to at least two signalling radio bearers as instructed by the cellular telecommunication system.

#### E. FURTHER CONSIDERATIONS

- 10 The present invention has several advantages. For example, the inventive solution retains the beneficial aspects of the prior art solutions described previously, while retaining the present specifications as unmodified as possible. Further, the inventive approach allows keeping of integrity protection in one protocol layer only, i.e. in RRC. The inventive method avoids the prior art problem of increasing the complexity of the PDCP protocol.

- 15 The inventive method is at the time of writing this patent application fully compatible with the present solutions regarding CND domain concepts and routing of higher layer signalling messages from or to CN domains based on CN domain identification information. The inventive method also requires no changes to lu interface specifications.

- 20 The inventive method also allows prioritization between different types of signalling, such as between RRC signalling and higher layer signalling. The inventive method further allows the use of different QoS parameters for different types of signalling. Further, the inventive solution will also allow usage of different integrity algorithm for NAS (network access stratum) and AS (access stratum)  
25 signalling, if that would be later required. This can be effected by allocating separate bearers for these signalling flows, and applying a bearer specific integrity algorithm for the bearers.

- 30 In the present application the term signalling is intended to cover transmission of messages of various protocols controlling various aspects of the functioning of the cellular telecommunication systems, i.e. other transmissions than payload data transmissions.

The term higher layer protocol is in this application and particularly in the accompanying claims intended to cover the Radio Resource Control protocol and

any other layer 3 protocol acting between the mobile station and the radio access network and all layer 3 or higher layer signalling protocols between the mobile station and core network, such as for example the Mobility Management, Call Control, and Session Management protocols.

- 5 The invention is applicable in so called third generation mobile cellular systems, such as the UMTS system (universal mobile telecommunication system) and corresponding systems. The various message names such as the RRC DIRECT TRANSFER message name are intended to be examples only, and the invention is not limited to using the message names recited in this specification.
- 10 In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention. While a preferred embodiment of the invention has been described in detail, it should be apparent that many modifications and variations thereto are possible, all of which fall within the true spirit and scope of the invention.




**Claims**


1. Method for transmission of signalling data in a cellular telecommunication system between the cellular network and a mobile communication means, characterized in that in the method, at least two signalling radio bearers are set up  
5 for transmission of signalling traffic and the cellular network configures how the signalling of higher layer protocols is mapped to said signalling radio bearers.
2. A method according to claim 1, characterized in that the method comprises the step of
  - routing of signalling traffic data units via said at least two signalling radio bearers  
10 according to predefined rules.
3. A method according to claim 2, characterized in that  
said predefined rules are set by a network element of a radio access network of the cellular telecommunication system.
4. A method according to claim 3, characterized in that  
15 said predefined rules are set by a radio network controller.
5. A method according to claim 1, characterized in that  
said setting up and configuration of said signalling radio bearers is performed during the RRC connection establishment procedure.
6. A method according to claim 1, characterized in that  
20 the method comprises steps of
  - setting up of a further signalling radio bearer during the RRC connection, and
  - configuring the mapping of higher layer signalling to said further signalling radio bearer and previously existing signalling radio bearers.
7. A method according to claim 1, characterized in that  
25 the method comprises the step of reconfiguring the mapping of higher layer signalling to said signalling radio bearers.

8. A method according to claim 1, characterized in that  
the method comprises the step of releasing a signalling radio bearer.
9. A method according to claim 2, characterized in that  
in said step of routing, signalling from different core network domains is routed via  
5 separate signalling radio bearers.
10. A method according to claim 2, characterized in that  
in said step of routing, signalling of a higher layer protocol is routed via a signalling  
radio bearer specific to said higher layer protocol.
11. A method according to claim 2, characterized in that  
10 in said step of routing, signalling traffic of a predefined group of higher layer  
protocols is routed via a signalling radio bearer corresponding to said predefined  
group.
12. A method according to claim 2, characterized in that  
in said step of routing, signalling traffic of higher layer protocols is routed via a  
15 signalling radio bearer based on a Quality of Service parameter attached to the  
higher layer protocol data.
13. A network element of a radio access network of a cellular telecommunication  
system, characterized in that  
the network element is arranged to set up at least two signalling radio bearers for  
20 transmission of signalling traffic and to configure how the signalling of higher layer  
protocols is mapped to said signalling radio bearers.
14. A network element according to claim 13, characterized in that the network  
element is a radio network controller.
15. A mobile communication means for a cellular telecommunication system  
25 characterized in that  
it is arranged to route radio resource control protocol messages to at least two  
signalling radio bearers as instructed by the cellular telecommunication system.

1/5

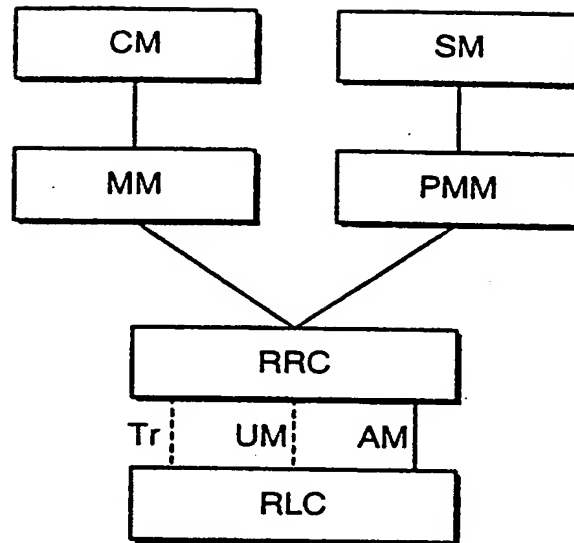


**Fig. 1**  
PRIOR ART


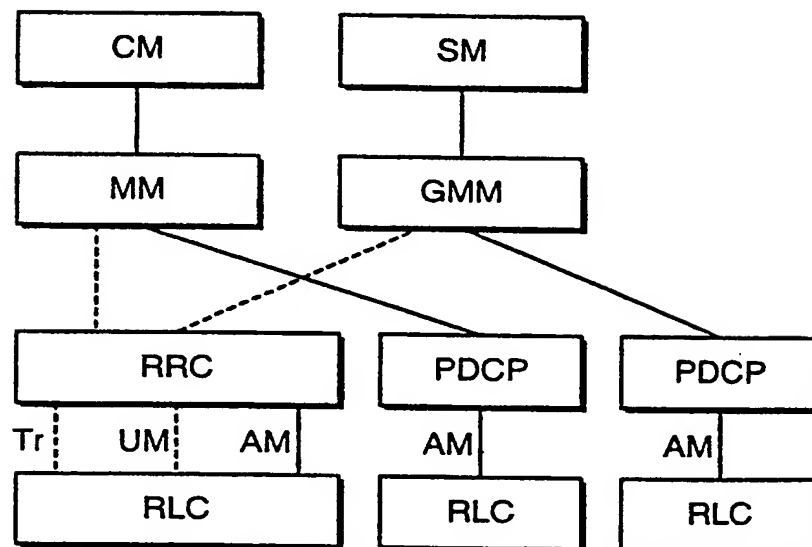


**Fig. 2**  
PRIOR ART


2/5

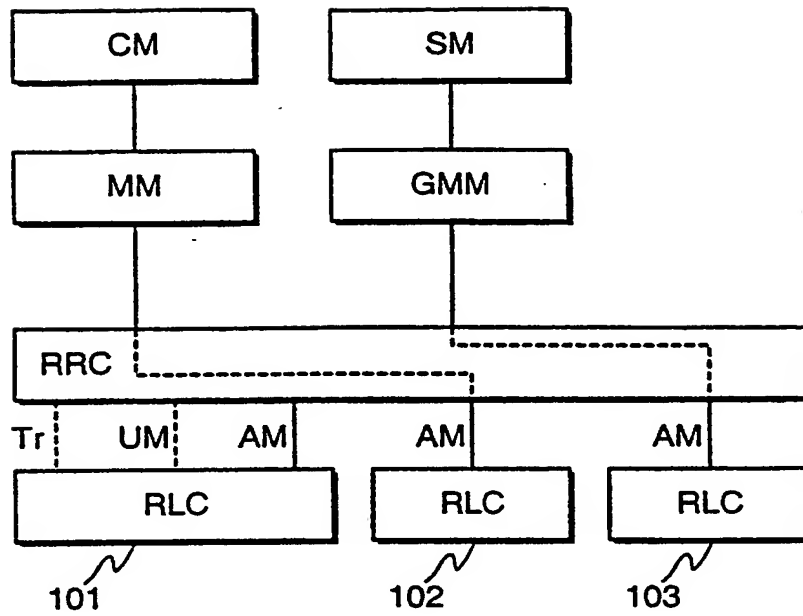**Fig. 3**

3/5

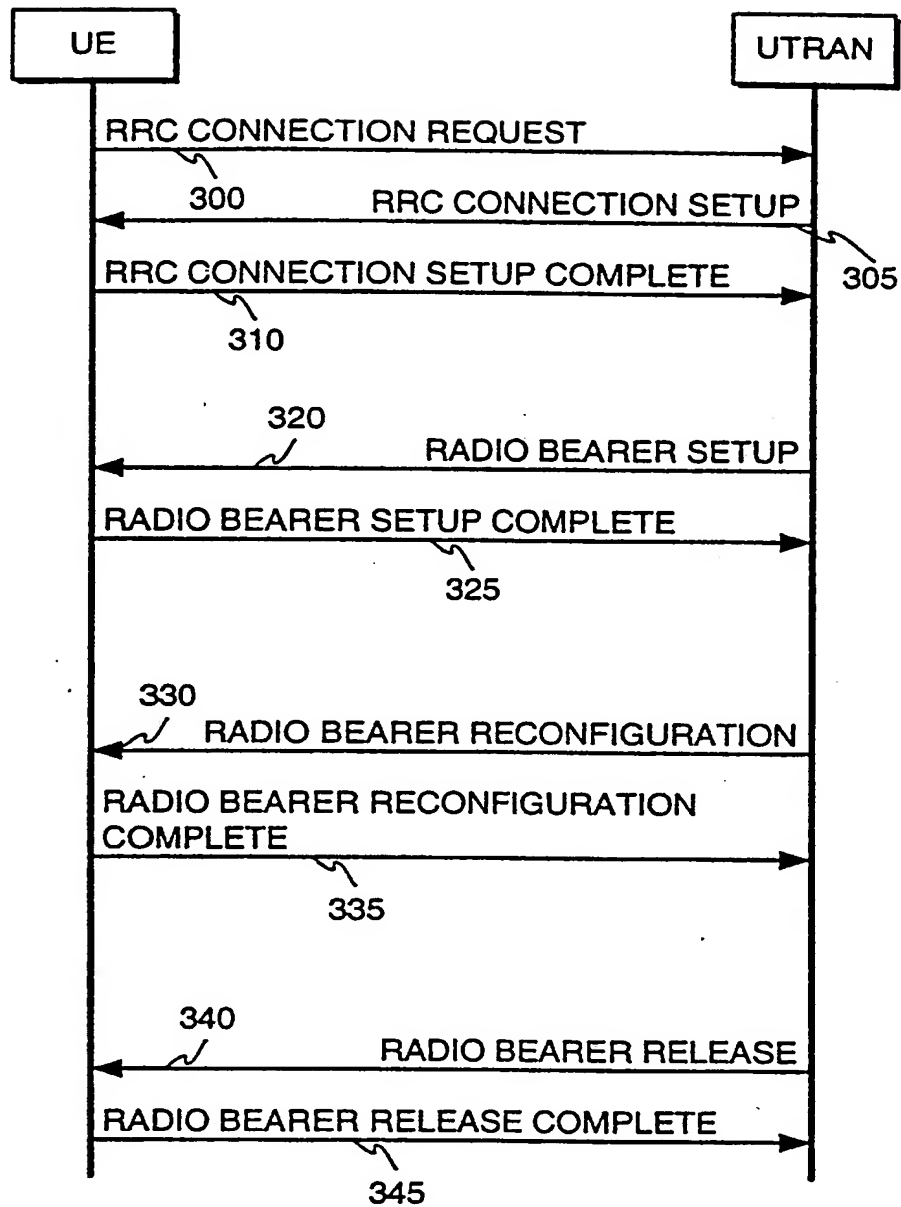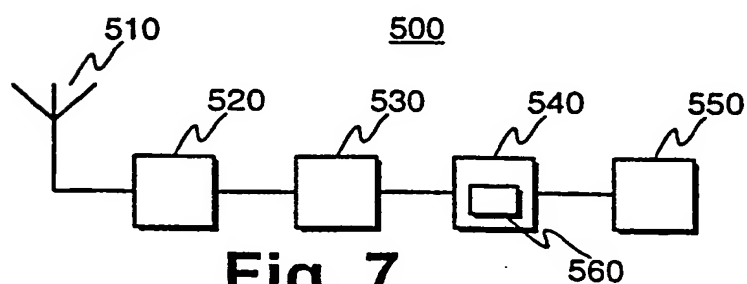**Fig. 4****Fig. 7**

4/5

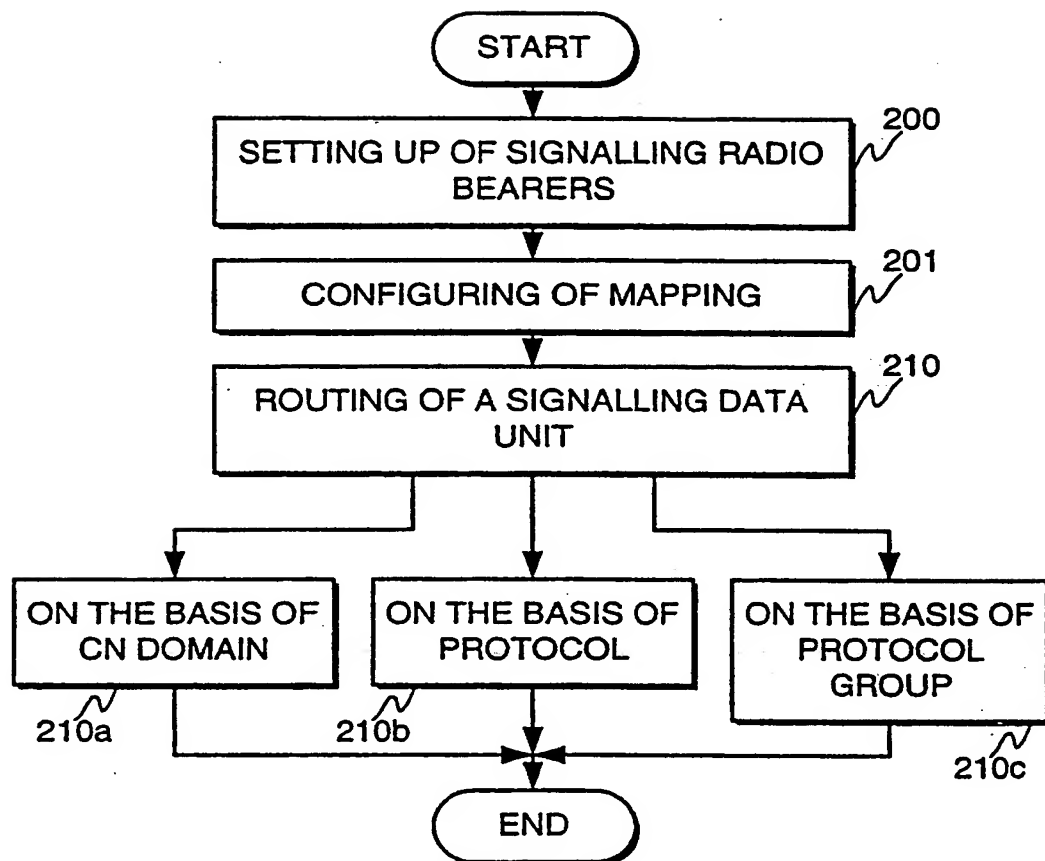**Fig. 5**

5/5

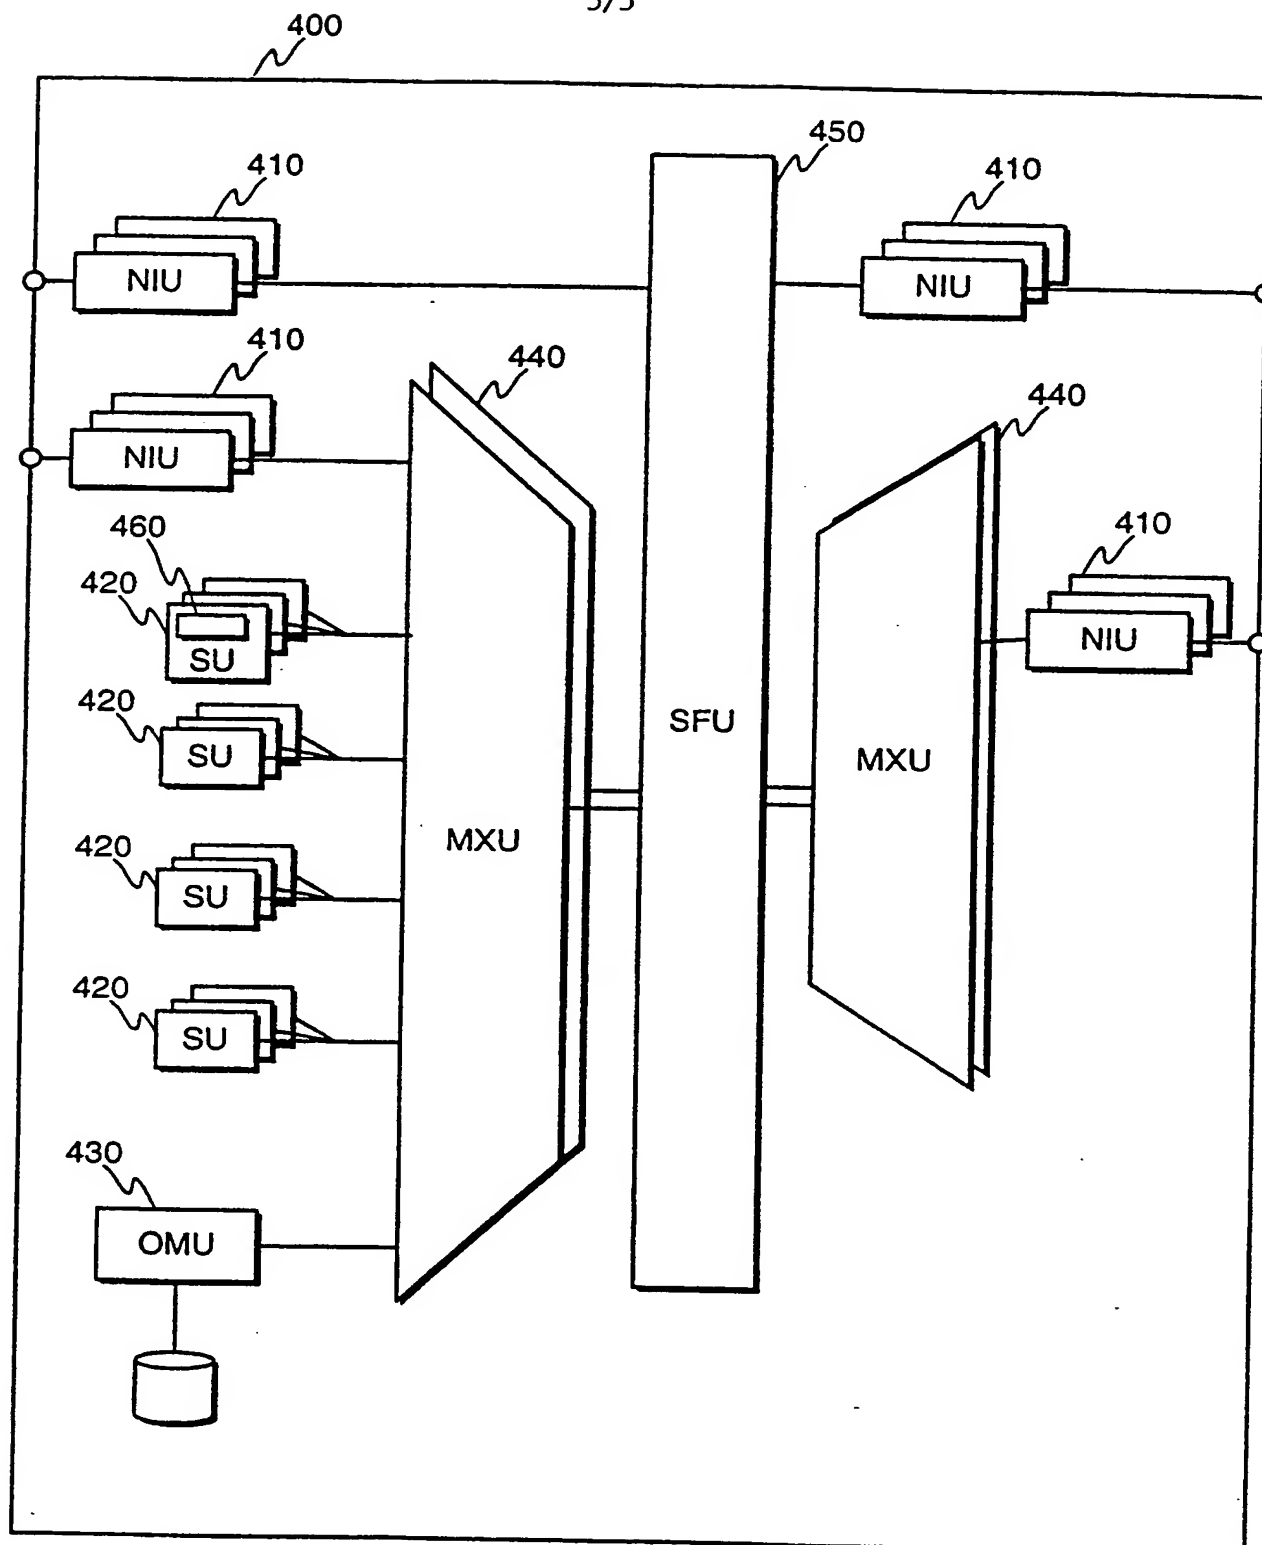


Fig. 6

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 00/00955

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9939528 A1 (NOKIA TELECOMMUNICATIONS OY), 5 August 1999 (05.08.99), abstract  --	1-15
A	GB 2312810 A (GPT LIMITED), 6 November 1997 (06.11.97), page 2, line 5 - page 3, line 23  --	1-15
A	WO 9315583 A1 (GPT LIMITED), 5 August 1993 (05.08.93), abstract  -----	1-15

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

15 February 2001

16 -02- 2001

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Stefan Hansson/JAN

Telephone No. +46 8 782 25 00



# INTERNATIONAL SEARCH REPORT

Information on patent family members

27/12/00

International application No.

PCT/FI 00/00955

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	9939528	A1	05/08/99	AU	8982298 A	16/08/99
				BR	9814925 A	17/10/00
				EP	1051870 A	15/11/00
				FI	3556 U	31/08/98
				FI	980208 A,V	30/07/99
<hr/>						
GB	2312810	A	06/11/97	GB	9708255 D	00/00/00
				CN	1170997 A	21/01/98
				EP	0805576 A	05/11/97
				GB	9609148 D	00/00/00
<hr/>						
WO	9315583	A1	05/08/93	DE	69205583 D,T	04/04/96
				EP	0577804 A	12/01/94
				EP	0602072 A,B	22/06/94
				SE	0602072 T3	
				GB	9201540 D	00/00/00
				JP	6510238 T	17/11/94
				US	5469617 A	28/11/95

**THIS PAGE BLANK (USPTO)**